


MEPV 320 - 335W

Half-cut | 5 Busbar | IP67

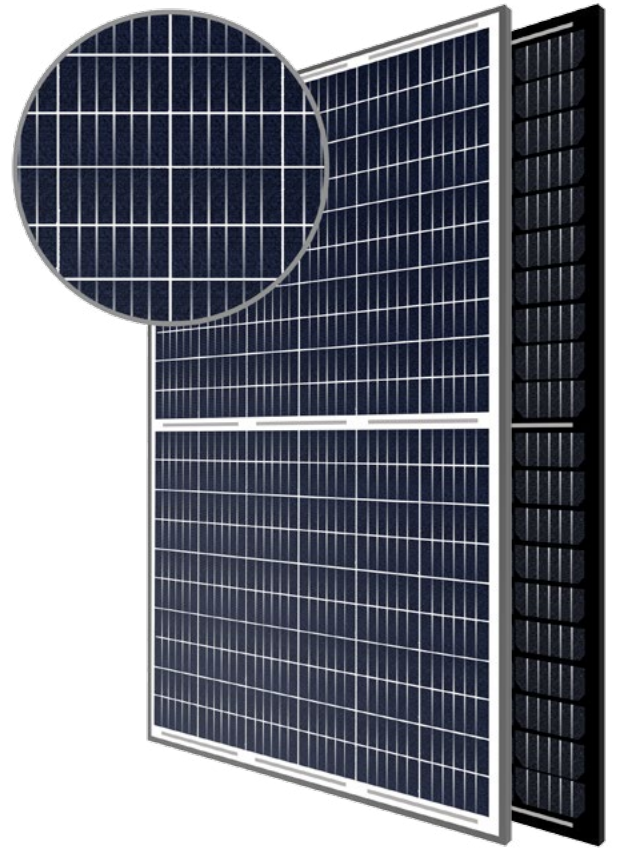

Quality

- / IP67
- / 6 diodes
- / Electroluminescence test
- / Friendly environment & recyclable materials
- / High transmissivity glass and high resistance
- / Frame with higher mechanical strength and air chamber

Certificates

- / IEC 61215
- / IEC 61730
- / VKF-AEAI compliance (Switzerland)
- / Class I (under standard UNI 9177)
- / WEEE compliance in Germany
- / ETL Listed Mark (USA-Canada)
- / EE016-20130528-001 (France)
- / Frontal load (snow) 5.400 Pa
- / Fire Resistance Certificate
- / Back load (wind) 2.400 Pa
- / MCS (UK)
- / SundaHus
- / ETN

15

YEARS PRODUCT WARRANTY

25

YEARS PERFORMANCE WARRANTY

PHOTON Laboratory talks about our modules:

"Eurener is one of the oldest module manufacturers in Europe: the Spanish company was founded in 1997. [...] It is distinguished by having values that are over the average: the temperature coefficient is quite better than other modules that are in the test field. The curve behavior at different irradiance conditions shows a marked efficiency increase in radiations from medium to high, and a slight drop in efficiency at low irradiance conditions. These factors show that this module could reach higher performance than the average in long-term measurements."



MEPV Half-cut 120

Standard - Black / 320 / 325 / 330 / 335 W





EUROPEAN QUALITY





Technical features

Frame
Black / Silver anodized aluminium 0,015 mm
Robust and resistant to corrosion
Built-in plug
Connection box
Sealed, robust and wide for heat dissipation
IP67 according to IEC 60529
Diodes by-pass built-in (3/6) for protection of the partial shading
Connector MC4 or compatible
Cables 300/1000mm (±0,1m) length and 4mm ² section
Fire Class I approval (UNI 9177)
Frontal
3,2 mm ARC tempered glass
Textured, extra-clear with low iron content
Solar cells
120 [2X(10X6)] cells monocrystalline silicon
Weight, dimensions and packaging
19 Kg 1675 x 992 x 35mm(+/-1%) Pack: 840 pcs-truck

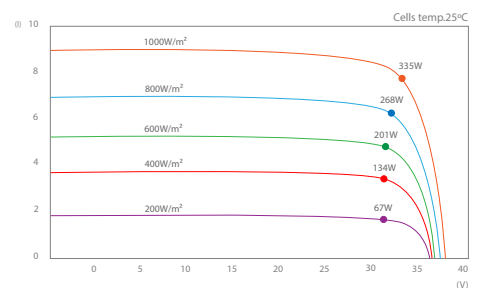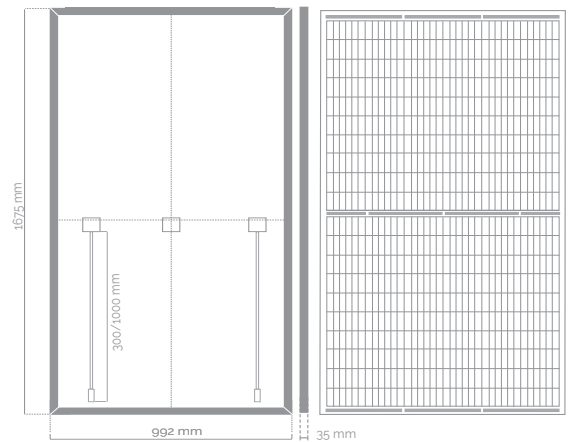

Electric data

Standard - Black	MEPV 320 - HC	MEPV 325 - HC	MEPV 330 - HC	MEPV 335 - HC
Nominal power, Pmpp	320 W	325 W	330 W	335 W
Tolerance, Pmpp	0 / +5W	0 / +5W	0 / +5W	±3W
Area of the module	1,66			
Module efficiency	19,30%	19,60%	19,90%	20,20%
Isc	10,15 A	10,21 A	10,32 A	10,37 A
Uoc	40,90 V	41,10 V	41,30 V	41,50 V
I _{mp}	9,58 A	9,67 A	9,76 A	9,85 A
U _{mp}	33,40 V	33,61 V	33,80 V	34,00 V
Maximum voltage	1,000 V			
α Isc	0,05% / °C			
β Uoc	- 0,29% / °C			
γ Pmax	- 0,39% / °C			
Temperature range	- 40°C to +85°C			
NOCT. Nominal Operating Cell Temperature	45°C ± 2°C			

NOTE: Read the instruction manual of this product and follow the indications STC. Values are valid for: 1000W/m², AM 1,5 and cell's temperature of 25°C. Measurement tolerance +/-3% (AAA Solar simulation -IEC 60904-9-). All the information of this brochure may be amended without notice by Eurener.